


FREEDOM NO-PULL HARNESS AND LEASH


EASY AS

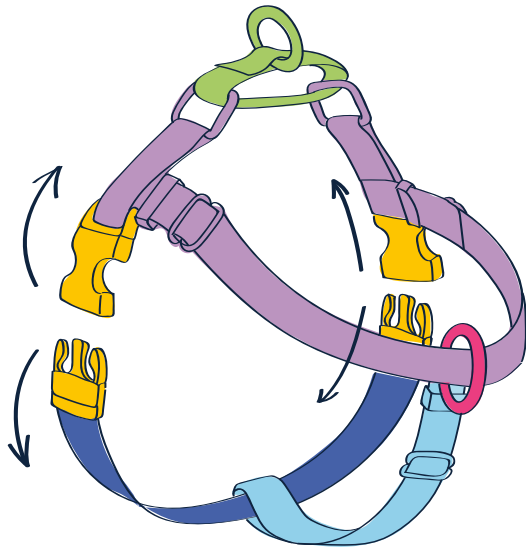

PARTS OF A HARNESS

- Martingale loop
- Side straps
- Buckles
- Sternum Strap
- Velvet Strap
- Front O-ring

1 FREEDOM NO-PULL HARNESS

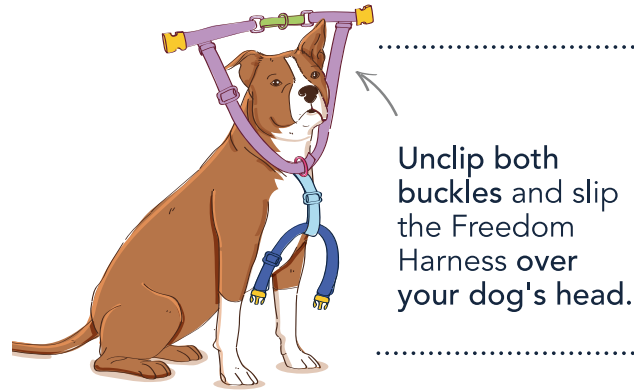


Unclip both buckles and slip the Freedom Harness over your dog's head.

2



Bring the sternum strap between the 2 front legs. Clip the buckles on each side of the dog's chest.

THE RESULT




Adjust the front straps so that the front O-ring sits snugly, it will be right at the breastbone and then adjust the sternum strap (the strap between the 2 front legs) so that the harness is snug but you can get 2 fingers under the straps.

ADDITIONAL NOTES


The most time you will spend with the Freedom No - Pull Harness is during the initial fitting.

3 DOUBLE CONNECTION TRAINING LEASH

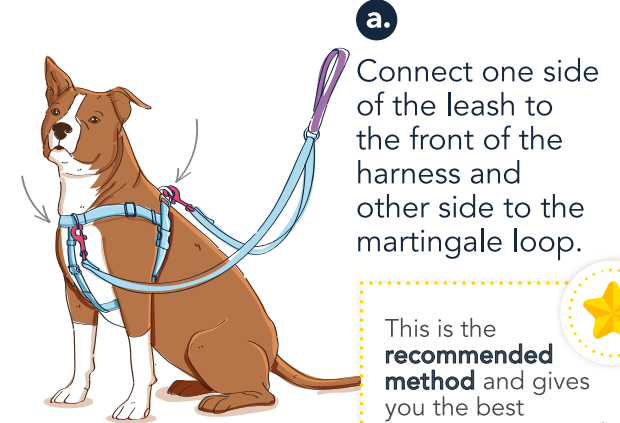


a. Connect one side of the leash to the front of the harness and other side to the martingale loop.

This is the **recommended method** and gives you the best communication and control with your dog.

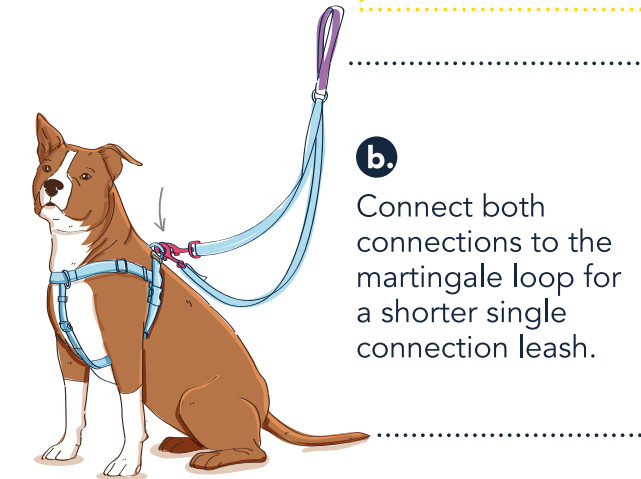

b. Connect both connections to the martingale loop for a shorter single connection leash.

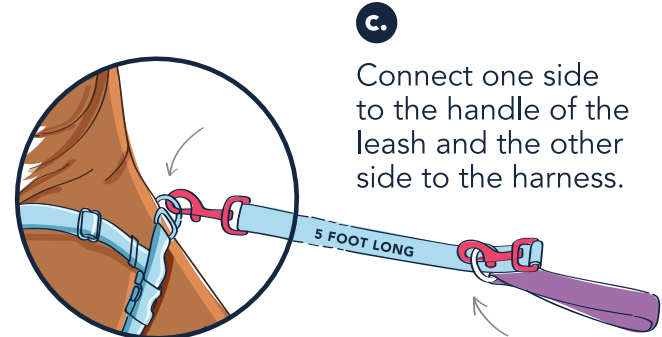

c. Connect one side to the handle of the leash and the other side to the harness.

..... ENJOY YOUR WALK!